



SUSSEX
FLOOR & WALL TILE




COLORS



Metropolis



Coastal



Titanium



Pearl



Mist Grey



Jasper



Tan



Dust Blue




Sand




Chisel Finish

Raw Finish


WALL TILE COLORS



Jet Black



Symphony Blue




Wisdom Grey



Essential Grey




Dew




Studio Beige




Pure



Cashmere




Ambition



Balance




Aqua



Nimbus



AVAILABLE SIZES

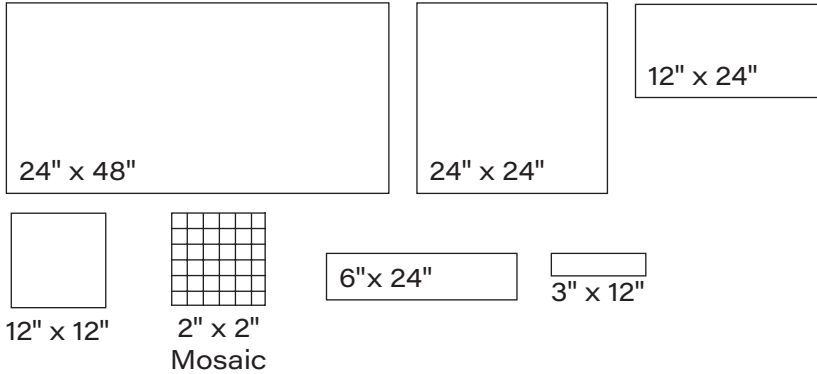

24" x 48" & 12" x 24" - Available in Matte, Raw & Chisled Finish
 24" x 24" & 12" x 12" - Only Available Matte & Raw Finish
 6" x 24" & 3" x 12" - Only Available as Glossy Wall Tile

FINISH

MATTE RECTIFIED
 RAW RECTIFIED
 CHISELED RECTIFIED
 GLOSSY WALL TILE

THICKNESS

10mm (Floor Tile Only)
 8mm (Wall Tile Only)

TRIM

3" x 12" Bullnose
 6" x 24" Wall Bullnose
 6" x 12" Cove Base

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8" or 3/16" (Wall Tile)

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.



TECHNICAL DATA

	D.C.O.F. WET (MATTE) ≥ 0.42 BOT 3000	WATER ABSORPTION ≤ 0.4% ASTM C373	CHEMICAL RESISTANCE NOT AFFECTED ASTM C650	FROST RESISTANCE RESISTANT ASTM C650	BREAKI STRENGTH ≥ 400lb ASTM C648	STAIN RESISTANCE NOT AFFECTED ASTM C1378
--	--	---	--	--	---	--

