




B&W



COLORS




White

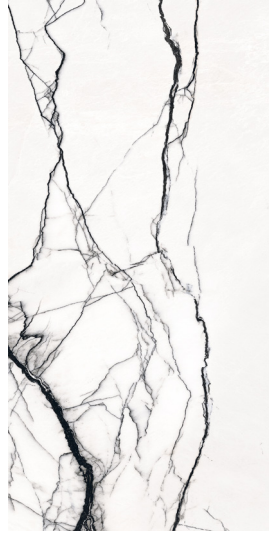


Breach



Wave

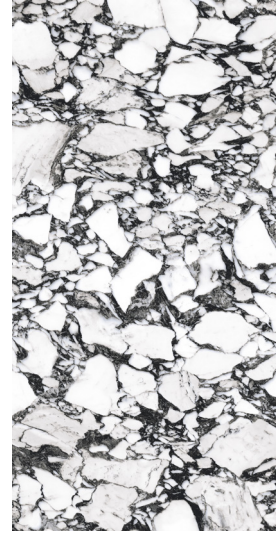

Pebble

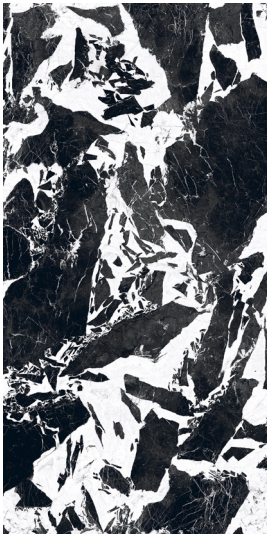


Fragment




Fall



Flow

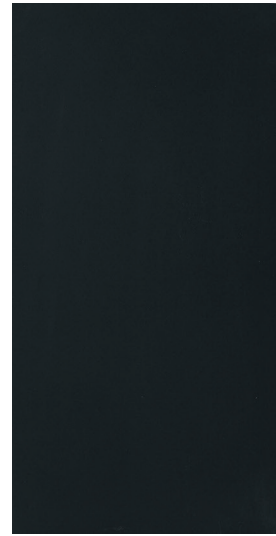


Black

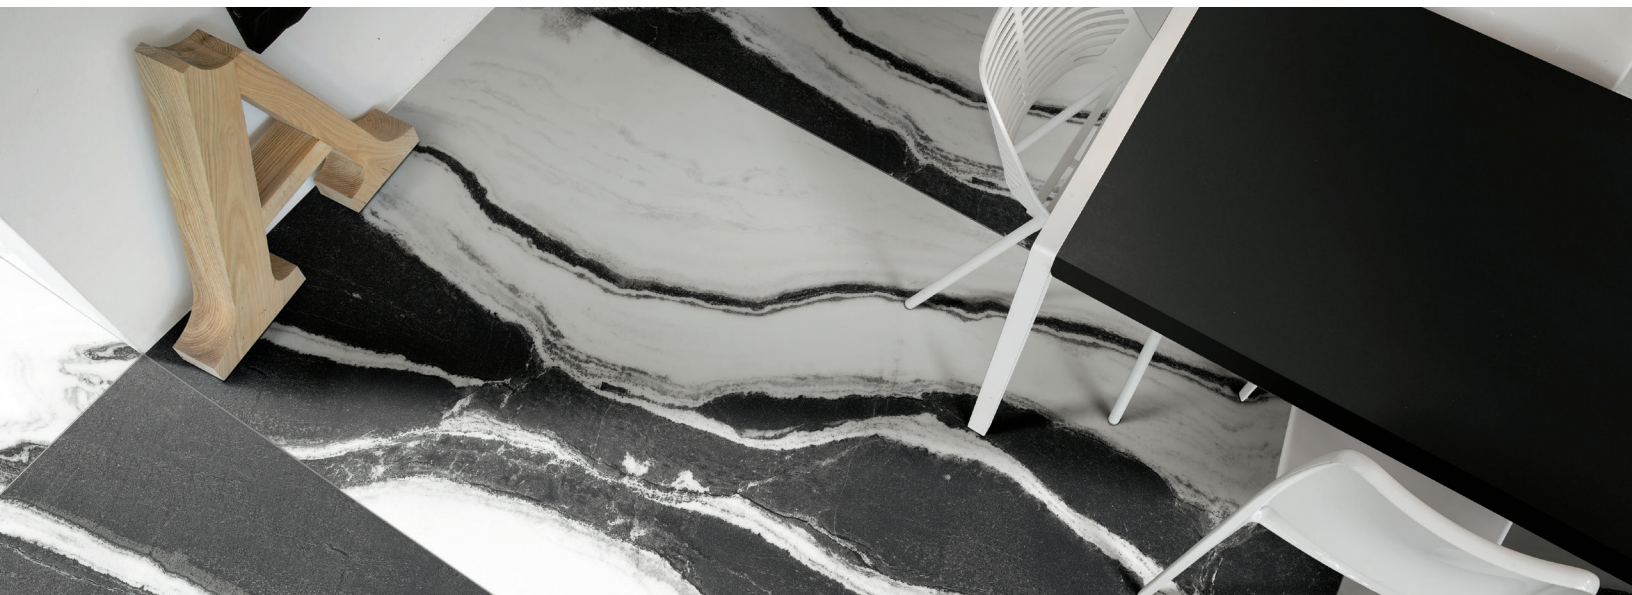


AVAILABLE SIZES

THICKNESS: 10MM

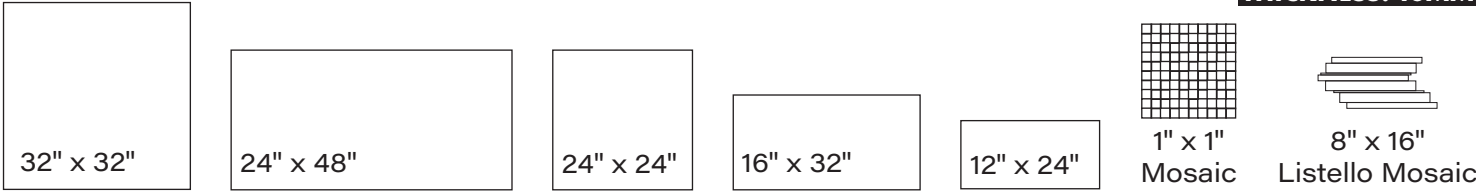

AVAILABLE SIZES

THICKNESS: 6MM

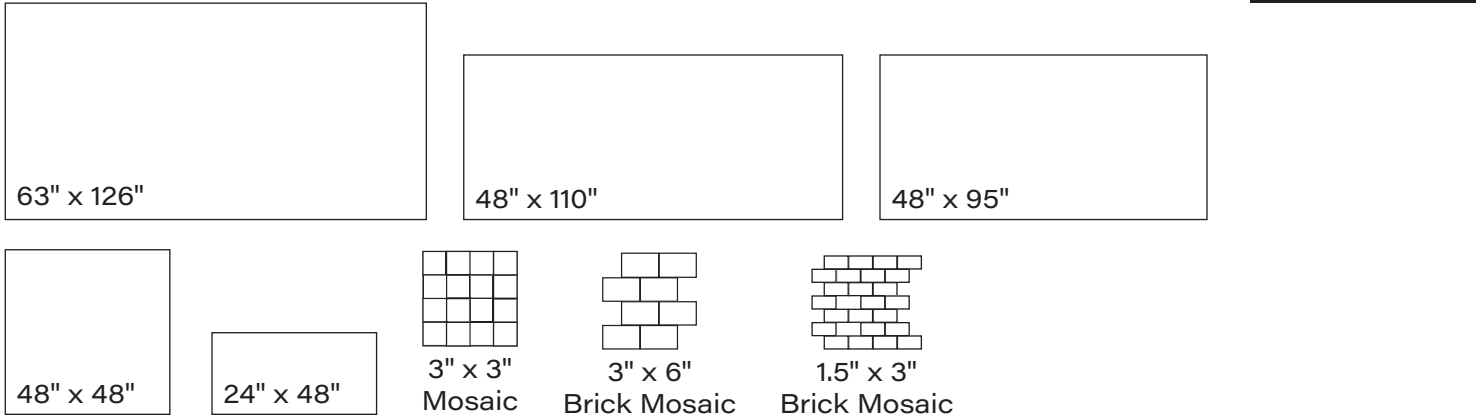

FINISH

MATTE RECTIFIED
POLISHED RECTIFIED

THICKNESS

10mm | 6mm

TRIM

1⁴/₅" x 24" Bullnose Thickness 10mm (Polished)
1³/₄" x 24" Bullnose Thickness 10mm | 6mm
13" x 48" Stair Tread Thickness 10mm

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

TECHNICAL DATA

	<p>D.C.O.F. WET (MATTE) > 0.42 ANSI 137.1</p>	<p>WATER ABSORPTION < 0.5% ISO 10545-3</p>	<p>CHEMICAL RESISTANCE UA-ULA-ULB ISO 10545-13</p>	<p>FROST RESISTANCE RESISTANT ISO 10545-12</p>	<p>BREAKING STRENGTH 3200 N ISO 10545-4</p>	<p>STAINING RESISTANCE CL. 4 - CL. 5 ISO 10545-7</p>
--	---	--	---	---	--	---

