





ELEGANCE PRO

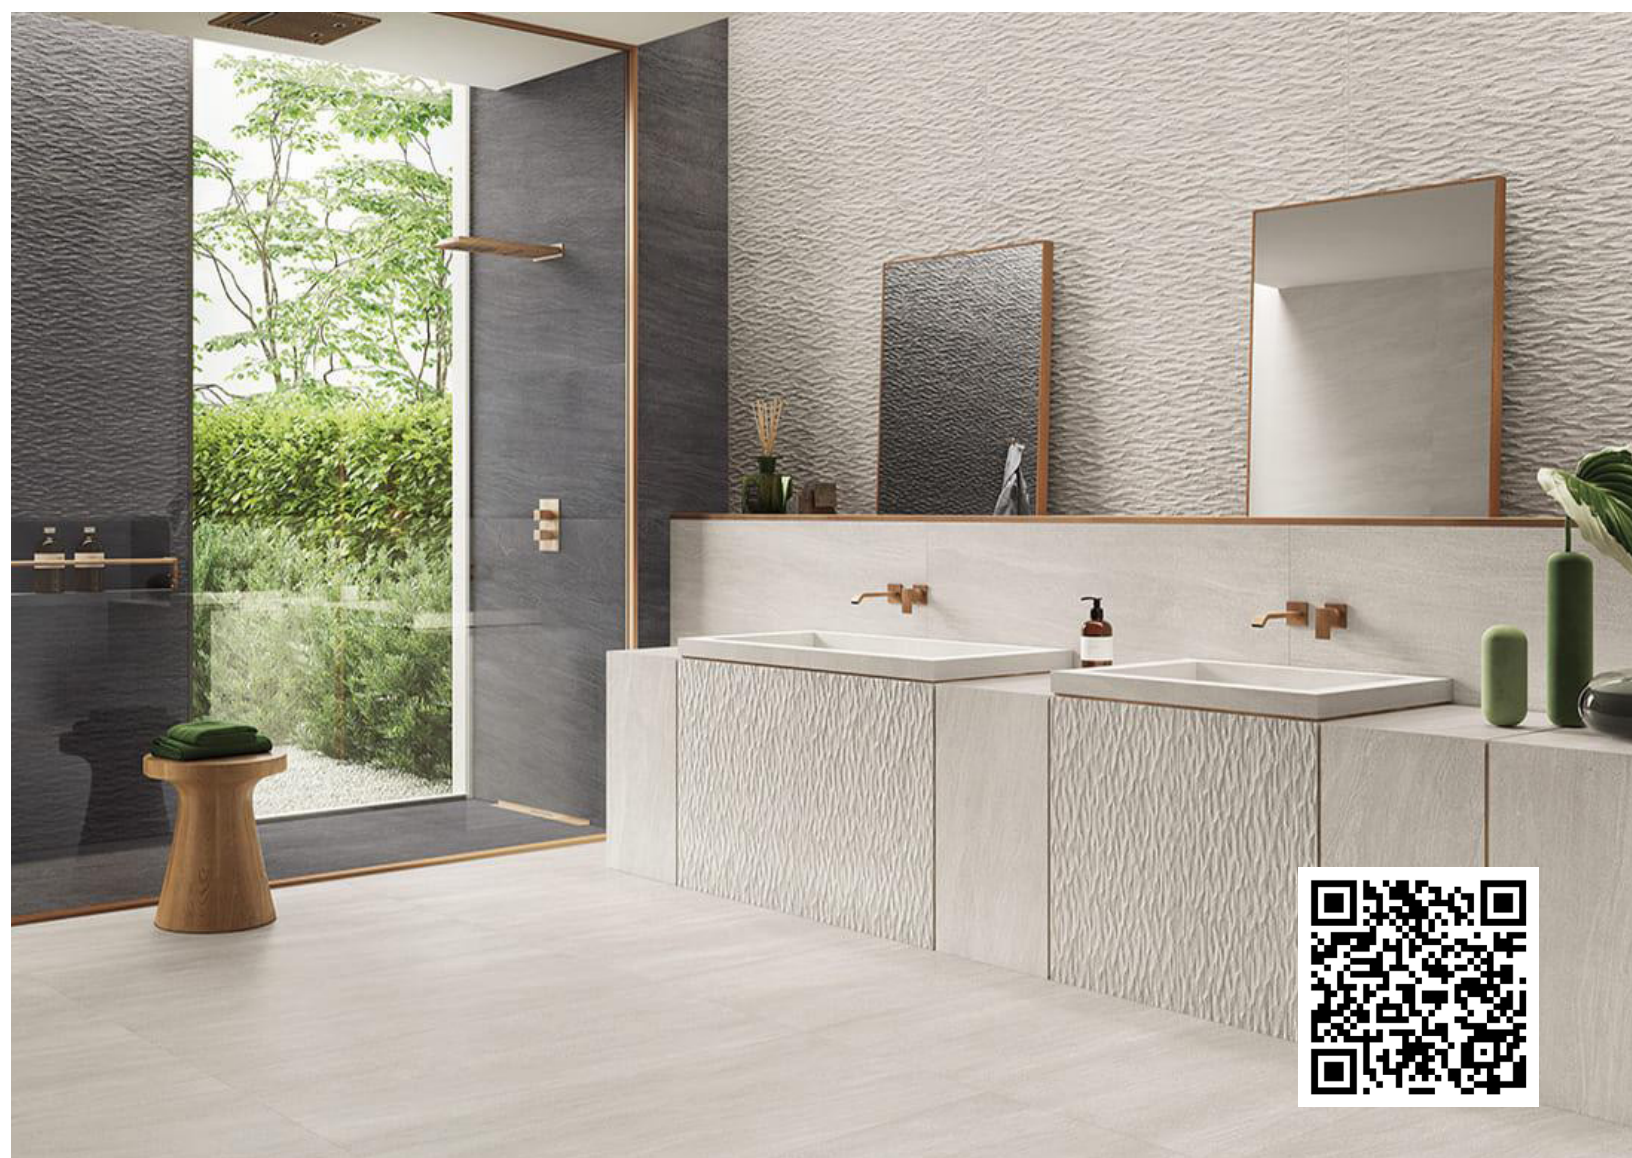

COLORBODY PORCELAIN TILE

COLORS


NATURAL

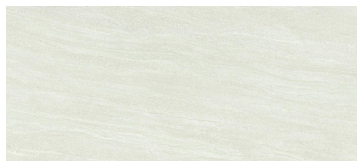

White



Ivory

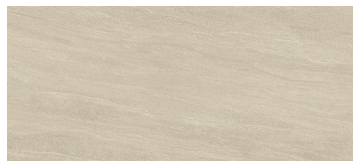

Sand




Taupe



Grey



Dark Grey

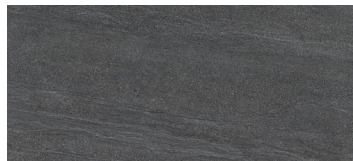

Anthracite

SEMI-POLISHED



White



Ivory



Sand




Taupe



Grey



Dark Grey

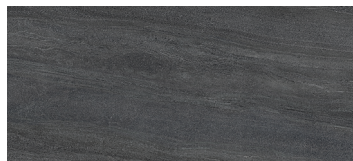

Anthracite

BUSH HAMMERED



Anthracite




MURAL




Anthracite

ELEGANCE PRO

AVAILABLE SIZES

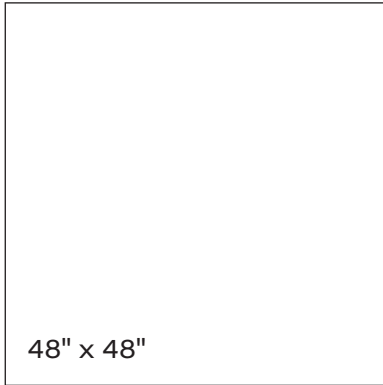

1.18" x 1.18"
Mosaic



48" x 48" - Available in Sand, White, Dark Grey & Anthracite in Natural Rectified Finish
 24" x 48" - Available in ALL COLORS and ALL FINISHES
 24" x 24" - Available in ALL COLORS in Natural Finish ONLY
 12" x 24" - Available in ALL COLORS. NOT available in Shield
 18" x 36" - Available in ALL COLORS. Natural Rectified Finish - 9.5mm Thickness
 18" x 36" - Available in Ivory, Grey, Dark Grey & Anthracite - 20mm Thickness

SHIELD: ANTIMICROBIAL PROCESS THAT HELPS TO REDUCE BACTERIAL GROWTH FOR CLEANER MORE PLEASANT LIVING SPACES.

The silver based technology helps inhibit the proliferation of bacteria and - unlike standard cleaning chemicals, which lose efficacy once the treated surface dries - the built-in technology of Shield remains active 24/7, helping reduce the risk of bacterial cross-contamination from surface to surface. Delivers up to 99.9% reduction in Escherichia coli and Staphylococcus aureus on treated surfaces.

Protection 24/7.

Shield ONLY available in 24" x 48" (Natural and Mural Finish)

FINISH

NATURAL RECTIFIED
 NATURAL SHIELD RECTIFIED
 SEMI-POLISHED RECTIFIED
 BUSH-HAMMERED RECTIFIED
 MURAL RECTIFIED
 MURAL SHIELD RECTIFIED

THICKNESS

9.5mm
 20mm (Only 18" x 36")

TRIM

3" x 24" Bullnose
 2" x 36" Bullnose
 12" x 48" Stair Tread

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

TECHNICAL DATA

	<p>D.C.O.F. WET MATTE ≥ 0.50 BUSH ≥ 0.65 ANSI A326.3</p>	<p>WATER ABSORPTION $< 0.5\%$ ASTM C373</p>	<p>CHEMICAL RESISTANCE A-LA-HA ASTM C650</p>	<p>FROST RESISTANCE UNAFFECTED ASTM C1026</p>	<p>BREAKING STRENGTH 400 lbs - 2500 lbs ASTM C648</p>	<p>STAIN RESISTANCE 5 ISO 10545-14</p>
--	--	---	--	---	---	--

