



DIJON





# COLORBODY PORCELAIN TILE


## COLORS



COUCHES



COMMARIN

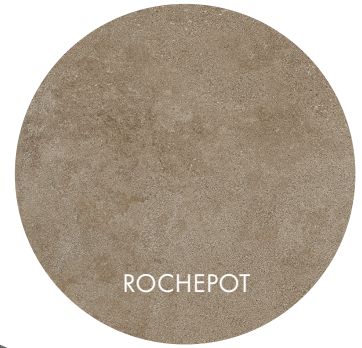

ROCHEPOT



BAZOCHES



CORMATIN \*

## AVAILABLE SIZES


### 9MM




24" X 48"



24" X 24"



12" X 24"



12" X 12"



6" X 6"



12" X 12"  
Mosaic



15" X 15 3/4"  
Soap Mosaic



12" X 15 3/4"  
Hexagon Mosaic

12" X 12" & 6" X 6" Only available in Soft Rectified Finish.

### 20MM



24" X 48"



24" X 24"




24" X 36"

20mm Sizes Only available in Grip Rectified Finish.

\*Cormatin NOT available in 20mm Grip Rectified Finish


### KIT FONTAINBLEAU



KIT FONTAINBLEAU - Includes a mixture of 12" X 8", 12" X 16", and 24" X 24" with Chiseled Edge 9MM Thickness in a box.

Available in All 5 Colors.

## SUGGESTED LAYING PATTERNS

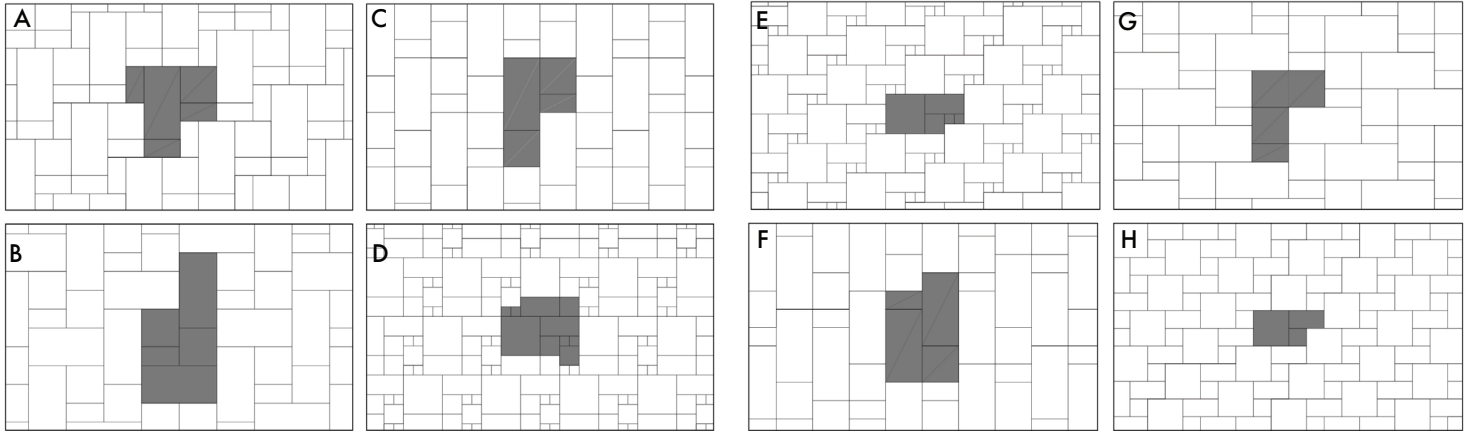

A. 24" X 48" ( 44.5%)  
 24" X 24" (22.2%)  
 12" X 24" (33.3%)

B. 24" X 48" ( 44.4%)  
 24" X 24" (44.4%)  
 12" X 24" (11.2%)

C. 24" X 48" ( 61.54%)  
 24" X 24" (30.77%)  
 12" X 24" (7.69%)

D. 24" X 48" ( 33.3%)  
 12" X 24" (33.3%)  
 12" X 12" (25%)  
 6" X 6" (8.4%)

E. 24" X 24" ( 53.3%)  
 12" X 24" (26.7%)  
 12" X 12" (12.3%)  
 6" X 6" (6.7%)

F. 24" X 48" ( 57.1%)  
 24" X 24" (28.6%)  
 12" X 24" (14.3%)

G. 24" X 48" ( 72.7%)  
 24" X 24" (18.2%)  
 12" X 24" (9.1%)

H. 24" X 24" ( 57.1%)  
 12" X 24" (28.6%)  
 12" X 12" (14.3%)

### FINISH

SOFT RECTIFIED  
 SEMI-POLISHED RECTIFIED  
 GRIP RECTIFIED

### THICKNESS

9mm | 20mm

### TRIM


2 <sup>7</sup>/<sub>8</sub>" X 24" Bullnose  
 12" X 24" Stair Tread  
 13 <sup>1</sup>/<sub>5</sub>" X 48" Stair Tread

## INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

## TECHNICAL DATA

	<p>D.C.O.F. WET (SOFT)</p> <p><b>&gt; 0.40</b></p> <p>ANSI 326.3</p>	<p>WATER ABSORPTION</p> <p><b>&lt; 0.5%</b></p> <p>ISO 10545-3</p>	<p>CHEMICAL RESISTANCE</p> <p><b>A LA HA</b></p> <p>ISO 10545-13</p>	<p>FROST RESISTANCE</p> <p><b>NO DAMAGE</b></p> <p>ISO 10545-12</p>	<p>BREAKING STRENGTH</p> <p><b>S ≥ 2.400 N</b> <small>9MM</small></p> <p><b>S ≥ 12.500 N</b> <small>20MM</small></p> <p>ISO 10545-4</p>	<p>ABRASION RESISTANCE</p> <p><b>&lt; 150 mm<sup>3</sup></b></p> <p>ISO 10545-6</p>
---	--	--	--	---	---	---



