




BIOTECH

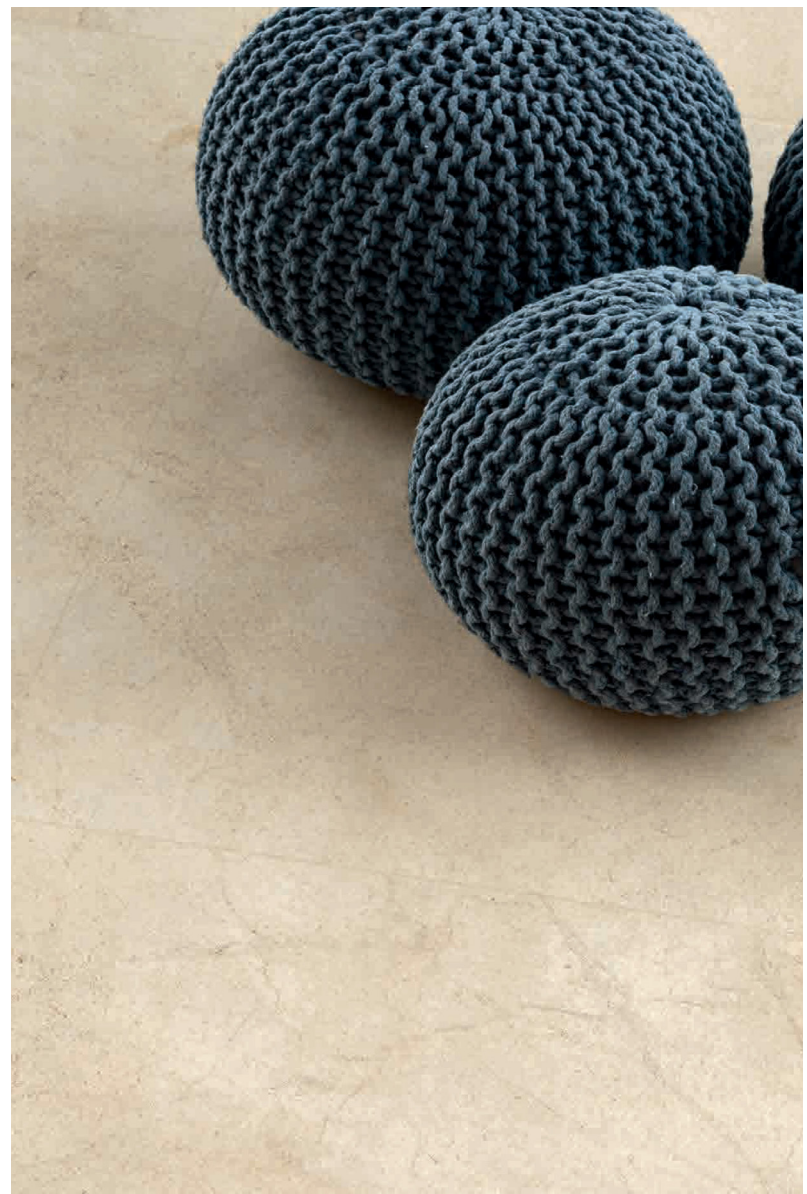

COLORBODY PORCELAIN TILE

COLORS



AVAILABLE SIZES

6MM

COLOR	48" X 111"	48" X 95"	48" X 48"	24" X 48"	MATTE RECTIFIED	SOFT RECTIFIED
CREMA STONE	●	●	●	●	●	●
STONEWOOD	●	●	●	●	●	●
LAPIS GREIGE	●	●	●	●	●	●
SERIZZO STONE	●	●	●	●	●	
SOAP STONE	●	●	●	●		●

9MM

COLOR	32" X 71"	24" X 48"	24" X 24"	12" X 24"	MATTE RECTIFIED	CANNETÉ ONLY 12" X 24"	SOFT RECTIFIED
CREMA STONE	●	●	●	●	●	●	
STONEWOOD	●	●	●	●	●	●	
LAPIS GREIGE	●	●	●	●	●	●	
SERIZZO STONE	●	●	●	●	●		
SOAP STONE	●	●	●	●			●


20MM

COLOR	24" X 48"	GRIP RECTIFIED
CREMA STONE	●	●
STONEWOOD	●	●
LAPIS GREIGE	●	●
SERIZZO STONE	●	●
SOAP STONE	●	●



AVAILABLE DECO

6MM

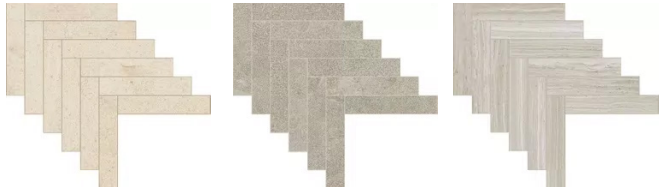


CREMA STONE

LAPIS GREIGE

STONEWOOD

HERRINGBONE MOSAIC

ONLY Available in Colors shown above in Matte Finish.

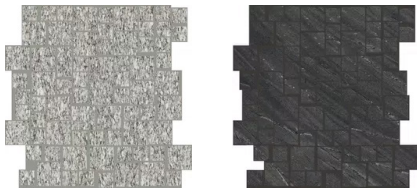

SERIZZO STONE

SOAP STONE


14" X 15" SQUARES MOSAIC

ONLY Available in Colors shown above.

Serizzo Stone ONLY available in Matte Finish.

Soap Stone ONLY available in Soft Finish.

9MM

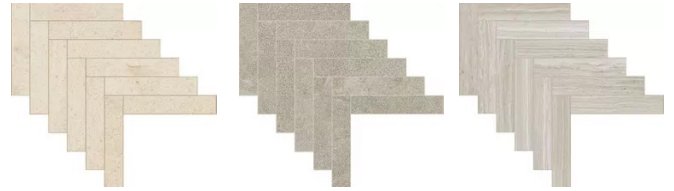

CREMA STONE

LAPIS GREIGE

STONEWOOD

HERRINGBONE MOSAIC

ONLY Available in Colors shown above in Matte Finish.



CREMA STONE

LAPIS GREIGE

STONEWOOD

12" X 15" TOUCH MIX MOSAIC

ONLY Available in Colors shown above in

FINISH

MATTE RECTIFIED
GRIP R11 RECTIFIED
R9 SOFT RECTIFIED
CANNETTÉ

THICKNESS

6mm | 9mm | 20mm

TRIM

2" X 24" Bullnose - 9mm Thickness
13" X 48" Stair Tread - 9mm Thickness


*Trims are available in ALL colors.
Soap Stone in Soft Finish & Matte Finish
in all other colors.*

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

TECHNICAL DATA

<p>V2-V3</p> 	<p>D.C.O.F. WET (MATTE)</p> <p>> 0.42</p> <p>ANSI 326.3</p>	<p>WATER ABSORPTION</p> <p>< 0.08%</p> <p>ISO 10545-3</p>	<p>CHEMICAL RESISTANCE</p> <p>LB HB A LA HA</p> <p>ISO 10545-13</p>	<p>FROST RESISTANCE</p> <p>NO DAMAGE</p> <p>ISO 10545-12</p>	<p>BREAKING STRENGTH</p> <p>2200 N^{9MM} 1350 N^{6MM}</p> <p>ISO 10545-4</p>	<p>ABRASION RESISTANCE</p> <p>140 mm³</p> <p>ISO 10545-6</p>
---	---	---	--	---	---	--

