




PLIMATECH




COLORBODY PORCELAIN TILE


COLORS

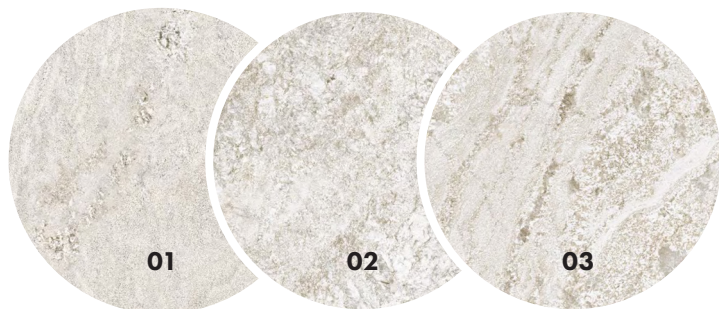

PLIMAWHITE

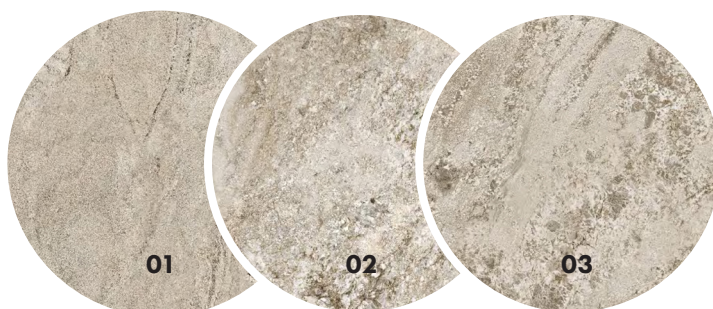

PLIMABEIGE

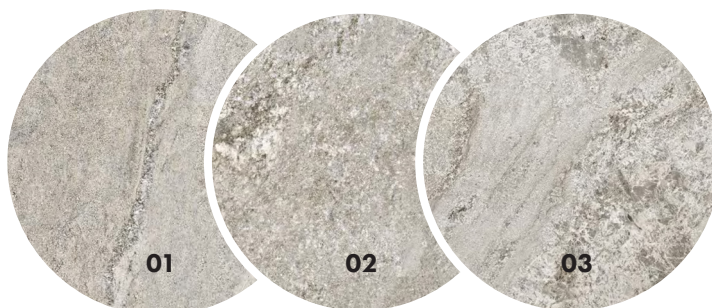

PLIMAGRAY


AVAILABLE SIZES

20MM



20mm ONLY available in Plimawhite 02, Plimabeige 02 & Plimagray 02 in Grip Rectified Finish.

9MM



Muretto 3D (A+B)


All sizes Available in All colors in Matte Rectified Finish

24" X 48" is the ONLY size available in Grip Rectified Finish in 9mm Thickness

Muretto 3D (A+B) Deco ONLY available in Plimawhite 02, Plimabeige 02 & Plimagray 02



AVAILABLE SIZES

6MM

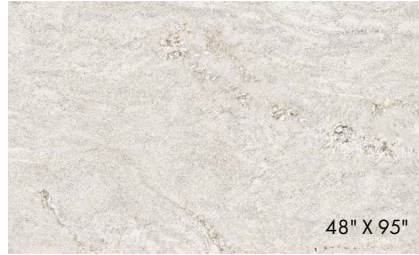

All sizes Available in All colors in Matte Rectified Finish ONLY.

Muretto & Hive Deco ONLY available in Plimawhite 02, Plimabeige 02 & Plimagray 02.



12" X 24" Muretto



12" X 14" Hive Mosaic

FINISH

MATTE RECTIFIED
GRIP RECTIFIED

THICKNESS

9mm | 6mm | 20mm

TRIM

2" X 24" Bullnose - 6mm & 9mm Thickness
13" X 48" Stair Tread - 9mm Thickness

Trims are available in ALL colors.

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.



TECHNICAL DATA

<p>V3-V4</p> 	<p>D.C.O.F. WET (MATTE)</p> <p>> 0.42</p> <p>ANSI 326.3</p>	<p>WATER ABSORPTION</p> <p>< 0.08%</p> <p>ISO 10545-3</p>	<p>CHEMICAL RESISTANCE</p> <p>UA ULA</p> <p>ISO 10545-13</p>	<p>FROST RESISTANCE</p> <p>RESISTANT</p> <p>ISO 10545-12</p>	<p>BREAKING STRENGTH</p> <p>1350 N 6MM 9MM 20MM 2200 N 14000N</p> <p>ISO 10545-4</p>	<p>ABRASION RESISTANCE</p> <p>140 mm³</p> <p>ISO 10545-6</p>
---	---	---	---	---	--	--

